

By Unisource

INCREASE YOUR PROFITS WITH ARTISAN BREADS!

Authentic Korean Style THREE PAN WIDE DECK OVENS

Features:

- Authentic Korean Style Oven
- Build Your Own Capacity oven with the space you need
- Three pan wide capacity
- Patented conduction & convection
- Modular fully insulated deck design
- One to four decks in height
- Each deck independently operated
- Double glazed full width/height viewing windows
- Standard steel decks. Optional single piece stone hearth on all decks with special glaze finish for easy cleaning available. (See below).
- Digital control panel features separate thermostat, bake and steam timers, upper, lower and front heat controls, interior light for each deck
- Guaranteed to bake even!
- Legs w/locking casters
- Conforms to CE, UL & NSF standards
- One year parts/labor warranty
- 24/7 nationwide service

STANDARD UNITS:

- UNI-UDOTK-3W-1 (Single Deck)
- UNI-UDOTK-3W-2 (Two Decks)
- UNI-UDOTK-3W-3 (Three Decks)
- UNI-UDOTK-3W-4 (Four Decks)

Options:

- UNI-UDOT-HCSS High Capacity Steam System
- UNI-UDOT-3W-1-STONE Hearth Stone
- UNI-UDOT-PR-3W Undercounter Proofer
- UNI-UDOT-3W-1-SSH 15" High Stainless Steel Hood with Extractor Fan 220/5 Amp/Single Phase



Bakery Aid

Three Pan Wide - Three Deck Oven Shown



Optional Undercounter Proofers Available








By Unisource

Authentic Korean Style THREE PAN WIDE DECK OVENS

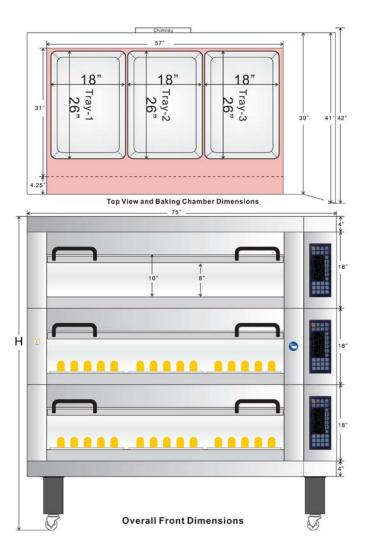


Three Pan Wide - Three Deck Oven Shown

Conforms to CE, UL, NSF standards

OPTIONAL PROOFER BASE

Designed to fit Milano II
Three Pan Wide Deck Ovens

| SPACESAVI | SPACESAVER PROOFER | | | | | |
|----------------|--------------------|-------|--|--|--|--|
| MODEL | WIDTH | HT. | | | | |
| UNI-UDOT-PR-3W | 75" | 26.6" | | | | |



- Fully Automatic Proofer
- Digital Controls
- All Stainless Steel Construction
- Advanced Humidification System For Precise Temperature & Humidity
- Auto Water Feed
- Stainless Steel Pan Slides Standard
- 18 Pan Capacity
- 208/220, 1 Phase, 12 Amps, Neutral & Ground With 6 Ft. Cord

NOTE: Can be used with 1, 2, 3 & 4 pan wide ovens only. Maximum of three decks allowed when using Proofer Base.

Requires 1/2" water connection, 3/4" drain connection and water filler with pressure regulator on both the oven and proofer.

| STANDARD DECK OVENS | | | | | | | | | | |
|---------------------|---------------|-------|------------|-------|-----------|-----------------|------|-----------------|------|--|
| MODEL | # OF DECKS | WIDTH | HEIGHT (H) | DEPTH | WT. | VOLTAGE | AMPS | VOLTAGE | AMPS | |
| UNI-UDOK-3W-1 | 1 | 75" | 64" | 43" | 720 lbs. | 208-220/3 phase | 35v | 208-220/1 phase | 41v | |
| UNI-UDOK-3W-2 | 2 | 75" | 57" | 43" | 1440 lbs. | 208-220/3 phase | 54v | 208-220/1 phase | 82v | |
| UNI-UDOK-3W-3 | 3 | 75" | 75" | 43" | 2160 lbs. | 208-220/3 phase | 71v | 208-220/1 phase | 123v | |
| UNI-UDOK-3W-4 | 4 | 75" | 93" | 43" | 2880 lbs. | 208-220/3 phase | 89v | 208-220/1 phase | 164v | |

Direct Phone & Service: (516) 527-3309 • (888) 443-7014 • info@unisourcefoodequipment.com • unisourcefoodequipment.com 170 Wilbur Place, Suite 300, Bohemia, New York, 11716